


APPOGGI IDRAULICI / HYDRAULIC JACK

DOPPIO EFFETTO CON VALVOLA DI BLOCCO / DOUBLE ACTING WITH SAFETY VALVE

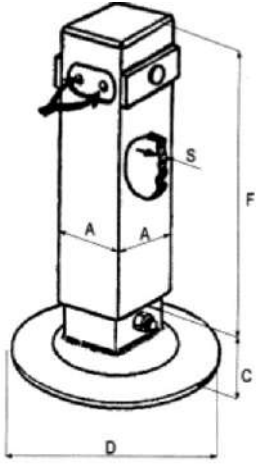

CODICE CODE	A mm.	C mm.	D mm.	F mm.	S mm.	CORSA mm. STROKE mm.	PORTATA Kg. a 150 bar. CAPACITY Kg. at 150 bar.	PESO Kg. WEIGHT Kg.
02.003051	80	65	220	580	4	400	1700	20
02.00305	80	65	220	680	4	500	1700	23
02.003011	90	65	220	800	4	600	2650	30
02.00301	90	65	220	600	4	400	2650	25
02.00302	90	65	220	700	4	500	2650	27
02.003041	100	65	290	800	4	600	3800	37
02.00303	100	65	280	600	4	400	3800	30
02.00304	100	65	280	700	4	500	3800	34
02.00306	110	65	290	700	4	500	5200	39
02.00307	120	70	290	800	4	600	5200	45